


LCD Phase Sequence Indicator(Contact Type)

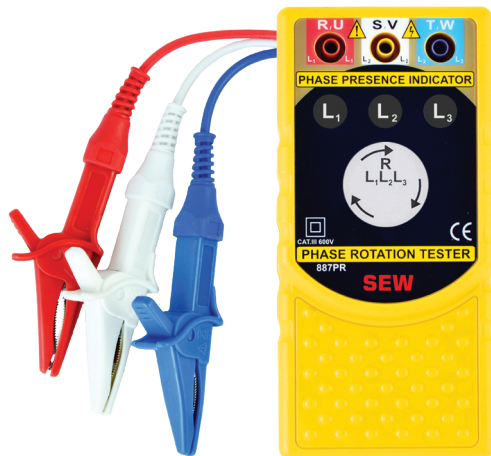

CE

887 PR

The **887 PR** is a 3 Phases Presence and Rotation Indicator.

It does not need any battery as it derives its power from the system under test.

It can be utilized on a **3 Phases Powered System** without having to worry about damage to the tester or the system.

Once connected to a 3 phase power system, it indicates the phase presence by showing its corresponding LCD symbol.

It displays the rotation (clockwise or anti-clockwise) on the LCD.

This instrument represents the quickest and easiest way for verifying the presence and rotation of a 3 phase system.


You can, before connecting Supply to Load, and from the supply side; **Quickly and easily verify the presence of the three Phases on a 3 Phase Power System.**

Confirm the Phase Rotation on a Powered 3 Phase System.

3 Phase Presence Indication circuit:

This circuit uses the LCD to indicate if a phase is present.

These LCD indicators will light up when the voltage across any two phases are more than 40Vac.

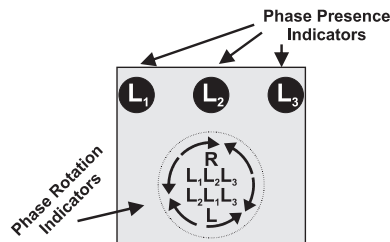

3 Phase sequence Rotation indicator circuit:

This circuit has also a LCD indication This product does not require any battery as it takes its power from the circuit under test.

FEATURES

- Indicates phase rotation
- Indicates phase presence
- No battery required
- Phase rotation and phase presence indicated on large liquid crystal display
- Color coded test leads
- Phase presence indication from as low as 40Vac to as high as 600Vac
- Fuse protection
- Compact, lightweight, and rugged
- EN 61010-1 CAT III 600V
- EN 61010-2-032
- Holster is optional

SPECIFICATIONS

ELECTRICAL

Determination of Phase Presence:

Voltage range for phase presence indication	From 40Vac to 600Vac
Frequency range	From 15Hz to 400Hz

Determination of the Phases Rotary Field Direction:

Voltage range for direction indication on lower LCD display	From 40Vac to 600Vac
Frequency range	From 15 Hz to 400Hz

Protection

Overload	700V (between all terminals)
Over voltage	Class III - 700V towards ground
Fuses	2 × 0.5A / 600V, 5 × 20mm, HBC, 600V Fast Blow

General

Current consumption	Max. 3mA
---------------------	----------

MECHANICAL

Dimensions	150(L) × 72(W) × 33.8(D)mm
Material	Poly carbonate / ABS
Weight (less soft pouch)	Approx. 158.5g
Display	LCD

ENVIRONMENTAL

Operating temperature range	1°C ~ 55°C not in full sun!!!
Storage temperature	-20°C ~ 70°C

