

Test Leads

AL-58, AL-58 HV









- Large test probe handle with shrouded 4mm brass caged banana plug tip
- Super insulated silicone wire, 2.5m
- Material: silicon
- Outside diameter: **AL-58: 6.5mm / AL-58 HV: 7mm**
- Safety straight input plug connect with extra green guard
- Rating:
EN 61010-031:2015
CAT III 15kVdc 20mA
- ⚠ Warning:
Only available for insulation tester

52F series



- **Terminal : 4mm banana plug**
- **Wire: PVC UL 1803 or silicone**
Length : 1100±30mm
Out diameter: 4mm
Braid copper wires (170 of 0.08mm)
- Remove test lead cap for attaching alligator clips
- Rating : EN 61010-031:2002 + A1:2008
CAT IV 1000V 0.5A / CAT IV 690V 2A
CAT IV 500V 10A / CAT IV 250V 10A

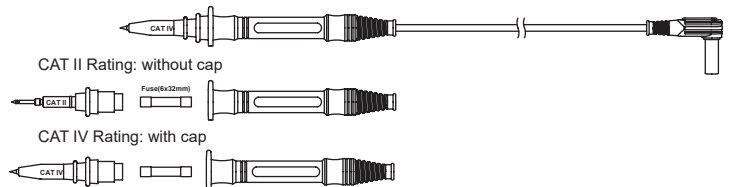

Model	L=Terminal	X=tip(mm)	Y=Fuse Rating	Z=Voltage Rating	Wire(Optional)
C5FX-YAZ	—	2	250V Fuse Rating 0.5-10A	1=250V	—
	—	4	500V Fuse Rating 0.5-10A	2=500V	—
	—	2-4	690V Fuse Rating 0.5-2A	3=690V	—
52F-LX-YAZ	L	2	1000V Fuse Rating 0.5A	4=1000V	PVC Wire Silicone Wire
	L	4			
	L	2-4			
52F-IX-YAZ	I	2	1000V Fuse Rating 0.5A	4=1000V	PVC Wire Silicone Wire
	I	4			
	I	2-4			

X=2,4,2-4 (tip type)
Y=0.5-10 (fuse rating)
Z=1-4 (voltage rating)